


SAFEBOARD™

FIA

FOAM INSTALLATION ASSIST

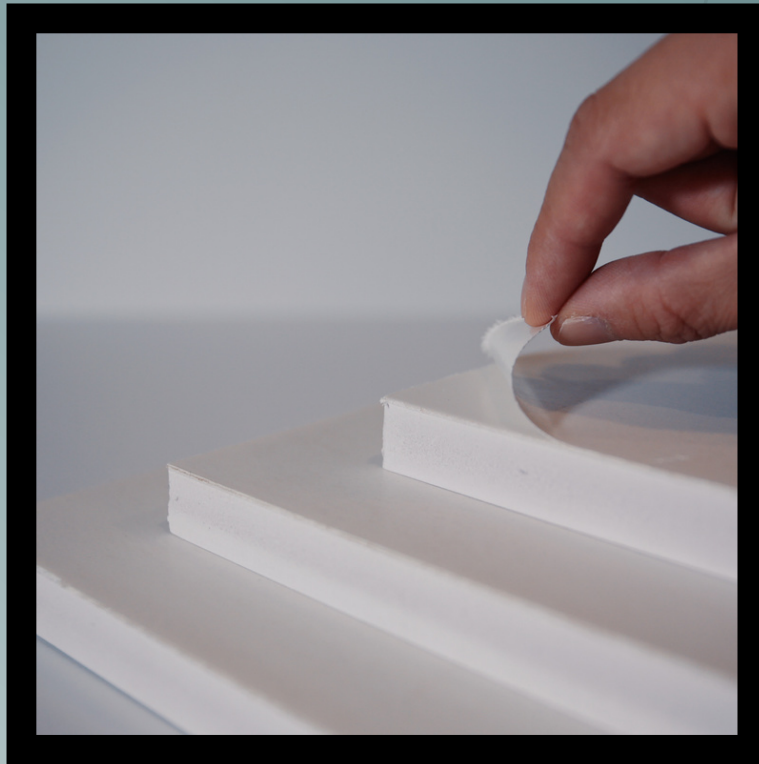

Installation Guide

Equipment Needed

- Cutting Tools
- Roller
- Cleaning Towels
- Cleaning Agent (Isopropyl Alcohol recommended)



Step-By-Step Guidelines

SAFEBOARD™ FIA (Foam Installation Assist) is intended to be installed onto already fabricated slab pieces

1. Cut FIA to the same shape as the fabricated pieces that are to be reinforced.
2. Once cut, ensure FIA will fit the fabricated piece.
3. Clean the bonding surface of your fabricated piece with cleaning agent (Isopropyl Alcohol recommended) and towels. Blow any remaining lint or debris.
4. Peel the protective paper off the Quick Stick side of FIA.
5. Carefully apply FIA to the bonding surface of your fabricated piece. IMPORTANT: once applied, the Quick Stick bond is permanent. Take extra care to ensure FIA is applied straight.
6. Apply pressure to the back of FIA surface to activate and strengthen the bond.
7. Bond will be at full strength after 24 hours, but can be handled immediately.

What is SAFEBOARD™ FIA?

SAFEBOARD™ FIA stands for "Foam Installation Assist". FIA is a high-density, rigid foam panel used to reinforce thin-bodied porcelain, sintered stone, and ultra-compact surfaces after fabrication but before installation. FIA is engineered to prevent slab breakage during intensive handling, transportation, and installation operations. The foam material absorbs shock and dampens vibration forces that would otherwise shatter fragile slabs.

What is SAFEBOARD™ Quick Stick?

SAFEBOARD™ Quick Stick is a pressure-sensitive adhesive that is pre-applied to FIA panels that makes for the quickest and easiest installation onto the back of a slab. Just peel off the protective paper, apply the FIA panel to your slab, and apply pressure. The initial bond has enough strength to handle the panels with ease, and fully cures after 24 hours.



CONTACT INFORMATION

(805) 626-7333

www.safeboardpro.com

sales@safeboardpro.com

