


SAFEBOARD®

OSP-X

OVERHANG SUPPORT - EXTRA STRENGTH

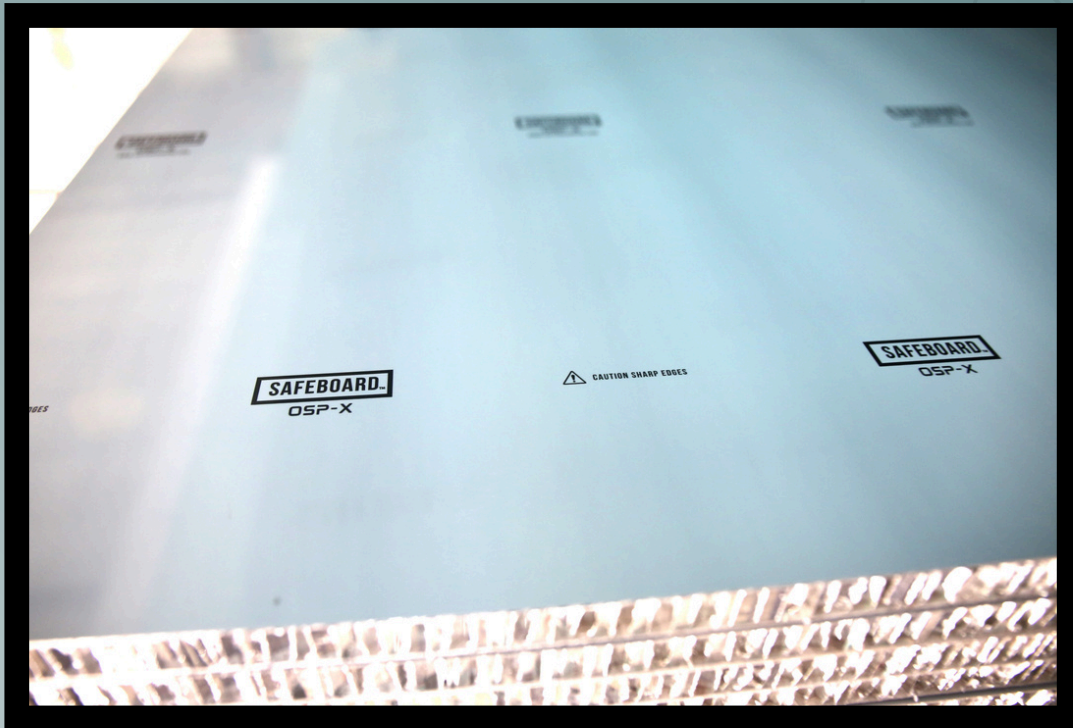

Installation Guide

Equipment Needed

- Cutting Tools
- Measurement Tools
- Drill
- SAFEBOARD® OSP Screws and star bit
- SAFEBOARD Hybrid Adhesive



Step-By-Step Guidelines

SAFEBOARD® OSP-X is intended to be used as a plywood replacement for countertop subtops. OSP-X is stronger than regular OSP and is rated for a 20" overhang. This extends up to a 24" overhang with Edge Caps installed.

1. SAFEBOARD® can be cut to size using a skill saw or a table saw. The blade used can be a wood blade or circular saw blade. Be sure to use protective gloves and safety glasses when cutting.
2. (if using Edge Caps) Install Edge Caps around the perimeter edges of OSP-X. Apply a thin bead of SAFEBOND inside the Edge Cap channels and even the spread using a SAFEBOARD® Adhesive Spreader. Press the Edge Caps onto the edges of the panel and clean any squeezed-out SAFEBOND.
 - a. If overhang width is over 8' and overhang length is over 20", split the panel in half and add an Edge Cap H-Channel between the two split panels for extra support.
3. Test the fit of the panel on top of the cabinet to ensure the panel has been cut to the correct size. Ensure the epoxy-primed side of OSP-X (the colored side) is facing up, and will be the side bonding to the stone top.
4. Ensure the desired overhang length is achieved from the cut panel. OSP-X can reach a 20" overhang without Edge Caps, and a 24" overhang with Edge Caps.
5. Map your screw pattern by measuring and marking on the sub-top where you will drive the screws. Evenly space screws 8 to 16 inches apart around the perimeter of the cabinet. Screws must start 2 inches in from the edge if possible. Use best judgement for screwing into unique cabinet shapes.
6. Screw the sub-top down to the frames of the cabinet using SAFEBOARD® OSP Screws (regular construction screws should NOT be used).
7. Bond your stone to OSP-X with a SAFEBOND Hybrid Adhesive and allow to cure for 7 days.

CONTACT INFORMATION

(805) 626-7333

www.safeboardpro.com

sales@safeboardpro.com

